




# THREE-PHASE HYBRID INVERTER

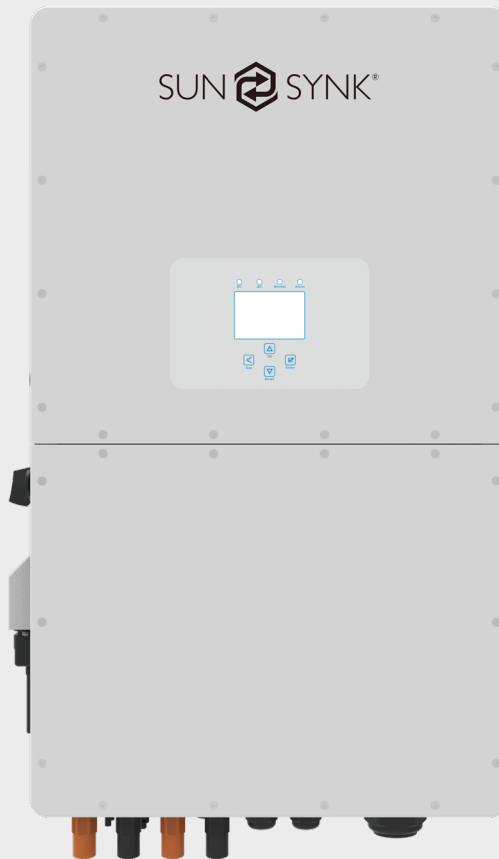

## DATASHEET

SUNSYNK-29.9K-SG01HP3-AU-BM3  
SUNSYNK-30K-SG01HP3-AU-BM3  
SUNSYNK-35K-SG01HP3-AU-BM3  
SUNSYNK-40K-SG01HP3-AU-BM4  
SUNSYNK-50K-SG01HP3-AU-BM4

[www.sunsynk.com](http://www.sunsynk.com)  
[sales@sunsynk.com](mailto:sales@sunsynk.com)  
[customerservices@sunsynk.com](mailto:customerservices@sunsynk.com)

Model	SUNSYNK-29.9K-SG01HP3-AU-BM3	SUNSYNK-30K-SG01HP3-AU-BM3	SUNSYNK-35K-SG01HP3-AU-BM3	SUNSYNK-40K-SG01HP3-AU-BM4	SUNSYNK-50K-SG01HP3-AU-BM4
<b>Battery Input Data</b>					
Battery Type	Li-Ion				
Battery Voltage Range	160~800V				
Max. Charging Current	50A+50A				
Max. Discharging Current	50A+50A				
Number of battery input	2				
Charging Strategy for Li-Ion Battery	Self-adaption to BMS				
<b>PV String Input Data</b>					
Max. DC Input Power	38870W	39000W	45500W	52000	65000W
Max. DC Input Voltage	1000V				
Start-up Voltage	180V				
MPPT Range	150-850V				
Full Load DC Voltage Range	360-850V	360-850V	420-850V	360-850V	450-850V
Rated DC Input Voltage	600V				
PV Input Current	36+36+36A			36+36+36+36A	
Max.PV Isc	55+55+55A			55+55+55+55A	
No. Of MPPT Trackers	3			4	
No. Of Strings Per MPPT Tracker	2+2+2			2+2+2+2	
<b>AC Output Data</b>					
Rated AC Output and UPS Power	29900W	30000W	35000W	40000W	50000W
Max. AC Output Power	29900W	33000W	38500W	44000W	55000W
Max. AC Output Apparent Power	29900VA	33000VA	38500VA	44000VA	55000VA
Peak Power (off grid)	1.5 time of rated power, 10 S				
AC Output Rated Current	45.4/43.4A	45.5/43.5A	53.1/50.8A	60.7/58.0A	75.8/72.5A
Max. AC Current	45.4/43.4A	50/47.9A	58.4/55.8A	66.7/63.8A	83.4/79.8A
Max. Three-phase Unbalanced Output Current	60A	60A	60A	70A	83.3A
Max. Continuous AC Pass through	200A				
Power Factor	0.8 leading to 0.8 lagging				
Output Frequency and Voltage	50/60Hz; 3L/N/PE 220/380, 230/400Vac				
Grid Type	Three Phase				
Total Harmonic Distortion (THD)	<3% (of nominal power)				
DC injection current (mA)	<0.5%In				

Model	SUNSYNK- 29.9K-SG01HP3- EU-BM3	SUNSYNK- 30K-SG01HP3- EU-BM3	SUNSYNK- 35K-SG01HP3- EU-BM3	SUNSYNK- 40K-SG01HP3- EU-BM4	SUNSYNK- 50K-SG01HP3- EU-BM4
<b>Efficiency</b>					
Max. Efficiency	97.60%				
Euro Efficiency	97.00%				
MPPT Efficiency	>99%				
<b>Protection</b>					
PV Input Lightning Protection	Integrated				
Anti-islanding Protection	Integrated				
PV String Input Reverse Polarity Protection	Integrated				
Insulation Resistor Detection	Integrated				
Residual Current Monitoring Unit	Integrated				
Output Over Current Protection	Integrated				
Output Shorted Protection	Integrated				
Output Over Voltage Protection	DC Type II / AC Type III				
Battery Over Current Protection	Fuses				
<b>Certifications and Standards</b>					
Grid Regulation	VDE4105, IEC61727/62116, VDE0126, AS/NZS 4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150				
EMC/Safety Regulation	IEC/EN 62109-1/2, IEC/EN 61000-6-1/2/3/4				
<b>General Data</b>					
Operating Temperature Range	-40~60 °C, >45 °C Derating				
Cooling	Intelligent air cooling				
Noise	≤65 dB				
Communication with BMS	RS485; CAN				
Weight	88kg				
Size	527W×894H×294D mm				
Protection Degree	IP65				
Installation Style	Wall-mounted				
Warranty	5 years				

## Importer

Sunsynk Australia Pty Ltd  
230 Morrison Road, Midvale, WA 6056, Australia  
+618 9274 4883  
Website: [www.sunsynk.com.au](http://www.sunsynk.com.au)  
Email: [admin@sunsynk.com.au](mailto:admin@sunsynk.com.au)

## Manufacturer

Sunsynk Limited HK ( Part of Global Tech )  
6 How Ming Street  
Kwun Tong  
Kowloon  
Tel: +852 2884 4318 Fax: +852 2884 4816  
Website: <http://www.sunsynk.com>  
E-mail: [support@sunsynk.com](mailto:support@sunsynk.com)



## CONTACT US

- Call us HK:** +852 2884 4318
- Room 702-704, 7/F Texwood Plaza, 6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.
- Call us UK:** +44 151 832 4300
- Sunsynk, 17 Turnstone Business Park, Mulberry Avenue, Widnes, Cheshire, WA8 0WN.
- Call us SA:** +27 10 100 3589
- Globaltech Sunsynk South Africa (Pty) Ltd, Unit 2 Highview Boulevard, Ferndale 2194.
- Call us NL:** +31 40 798 7136
- Sunsynk EU, Henri Wijnmalenweg 8, 5657 EP Eindhoven, Netherlands.

GlobalTech Ltd



SGS

UK CA CE

Powered by  
SUN SYNK