




SINGLE-PHASE HYBRID INVERTER

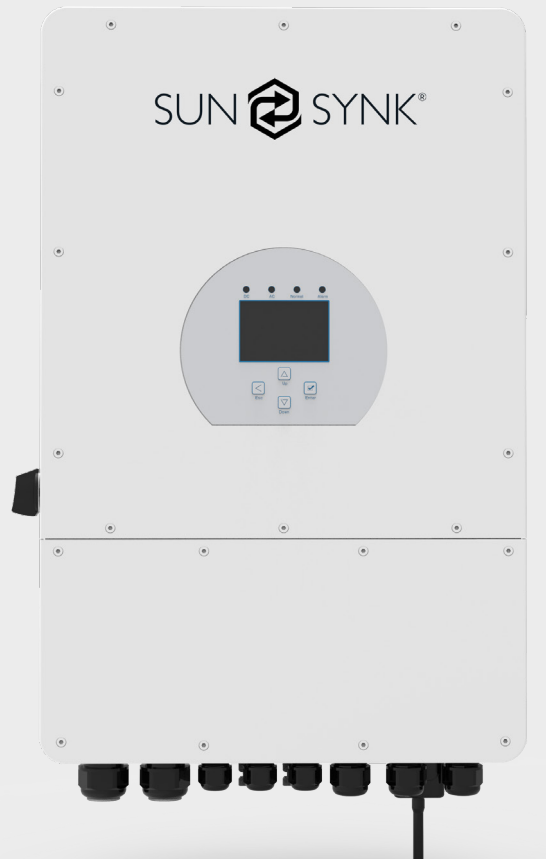


DATASHEET

SUNSYNK-10K-SG02LP1-AU
SUNSYNK-12K-SG02LP1-AU

www.sunsynk.com
sales@sunsynk.com
customerservices@sunsynk.com

v.4 (04/03/24)

 PLEASE RETAIN FOR
FUTURE REFERENCE

Model	SUNSYNK-10K-SG02LP1-AU	SUNSYNK-12K-SG02LP1-AU
Battery Input Data		
Battery Type	Lead-acid or Lithium-ion	
Battery Voltage Range	40~60V	
Max. Charge Current	220A	250A
Max. Discharge Current	220A	250A
Charging Curve	3 Stages/Equalisation	
External Temperature Sensor	Yes	
Charging Strategy for Li-Ion Battery	Self-Adaptation to BMS	
PV String Input Data		
Max. PV Input Power	13000W	15600W
Max. PV Input Voltage	500V	
MPPT Voltage Range	150V~425V	
Start-up Voltage	125V	
Rated PV Input Voltage	370V	
Max. Operating PV Input Current	26A+26A+26A	
Max. PV Isc	44A+44A+44A	
No. of MPPT / Strings Per MPPT	3 / 2+2+2	
AC Input/Output Data		
Rated AC Input/Output Active Power	10000W	12000W
Max. AC Input/Output Apparent Power	11000VA	13200VA
Rated AC Input/Output Current	45.5/43.5A	54.6/52.2A
Max. AC Input/Output Current	50/47.9A	60/57.4A
Max Continuous AC Passthrough	60A	
Peak Power (Off-Grid)	2 times of rated power, 10 S	
Power Factor	0.8 leading to 0.8 lagging	
Output Frequency and Voltage	50Hz/60Hz; 220/230Vac	
Grid Connection Form	L+N+PE	
Total Current Harmonic Distortion (THDi)	<3% (of nominal power)	
DC Current Injection	<0.5% In	
Efficiency		
Max. Efficiency	97.60%	
Euro Efficiency	96.50%	
MPPT Efficiency	>99%	
Protection		
Integrated	PV Arc Fault Detection, PV Input Lightning Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge Protection, Over Voltage Category.	
Integrated (Active Frequency Shift)	Anti-islanding Protection	
Surge Protection Level	TYPE II(DC), TYPE II(AC)	
Over Voltage Category	OVC II(DC), OVC III(AC)	
Certifications and Standards		
Grid Regulation	AS-NZS 4777.2	
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2	

General Data

Operating Temperature Range	-40 to +60°C, >45°C Derating
Cooling	Intelligent Air Cooling
Noise	<45dB
Communication with BMS	RS485; CAN
Net Weight	36 kg
Gross Weight	42 kg
Size	420W×670H×233D mm (Excluding connectors and brackets)
Protection Degree	IP65
Installation Style	Wall-mounted
Warranty	5 Years

Importer

Sunsynk Australia Pty Ltd
230 Morrison Road, Midvale, WA 6056, Australia
+618 9274 4883
Website: www.sunsynk.com.au
Email: admin@sunsynk.com.au

Manufacturer

Sunsynk Limited HK (Part of Global Tech)
7/F. Texwood Plaza, 6 How Ming Street
Kwun Tong
Kowloon
Tel: +852 2884 4318 Fax: +852 2884 4816
Website: <http://www.sunsynk.com>
E-mail: support@sunsynk.com



CONTACT US

- Call us:** +44 151 832 4300 **Email us:** sales@sunsynk.com
- HK Address:** Room 702-704, 7/F Texwood Plaza, 6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.
- UK Address:** Sunsynk UK Ltd, 17 Turnstone Business Park, Mulberry Avenue, Widnes, Cheshire, WA8 0WN.
- SA Address:** Globaltech Sunsynk South Africa (Pty) Ltd, Unit 2 Highview Boulevard, Ferndale 2194.
- NL Address:** Sunsynk NL BV, Henri Wijnmalenweg 8, 5657 EP Eindhoven, Netherlands.

GlobalTech Ltd



SGS

UK
CA CE

Powered by
SUN SYNK